


## PNP General Purpose Amplifier



**SOT-23**

### Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- High Conductance
- High Voltage
- Part no. with suffix "Q" means AEC-Q101 qualified

### Applications

- PNP General Purpose Amplifier

### Mechanical Data

- Case: SOT-23
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Marking: 2D

### ■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Value
Collector-Base Voltage	$V_{CBO}$	V	-300
Collector-Emitter Voltage	$V_{CEO}$	V	-300
Emitter-Base Voltage	$V_{EBO}$	V	-5
Collector Current -Continuous	$I_C$	mA	-300
Total Device Dissipation	$P_D$	mW	300
Junction Temperature	$T_j$	°C	-55 to +150
Storage Temperature	$T_{STG}$	°C	-55 to +150



## ■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	$I_C = -100\mu A, I_E = 0$	-300		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	$I_C = -1mA, I_B = 0$	-300		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = -100\mu A, I_C = 0$	-5		
Base cut-off current	$I_{CBO}$	nA	$V_{CB} = -200V, I_E = 0$			-250
Emitter cut-off current	$I_{EBO}$	nA	$V_{EB} = -5V, I_C = 0$			-100
DC current gain	$h_{FE}$		$V_{CE} = -10V, I_C = -1mA$	60		
	$h_{FE}$		$V_{CE} = -10V, I_C = -10mA$	100		200
	$h_{FE}$		$V_{CE} = -10V, I_C = -30mA$	60		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C = -20mA, I_B = -2mA$			-0.5
Base-emitter saturation voltage	$V_{BE(sat)}$	V	$I_C = -20mA, I_B = -2mA$			-0.9



## ■ Other Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Transition frequency	$f_t$	MHz	$V_{CE} = -20V, I_C = -10mA, f = 30MHz$	50		


## ■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMBTA92Q	F2	Approximate 0.01	3000	30000	120000	7" reel


## ■ Characteristics(Typical)

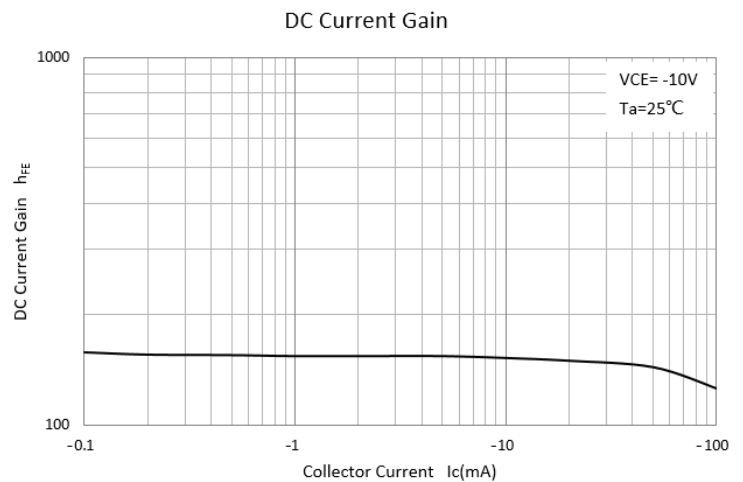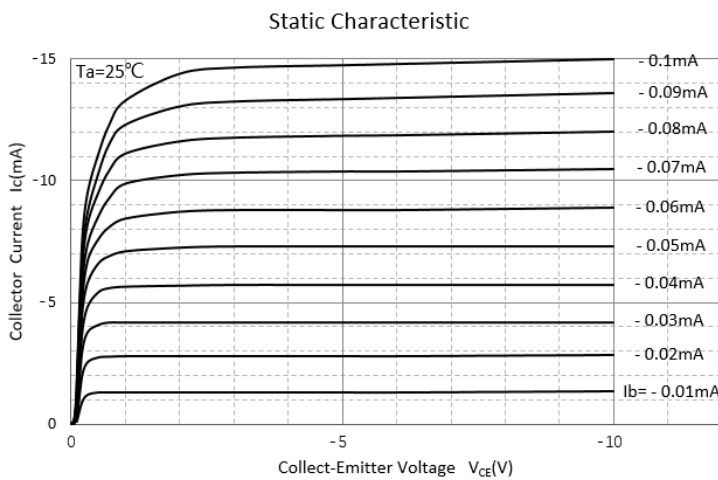


Collector-Emitter Saturation Voltage

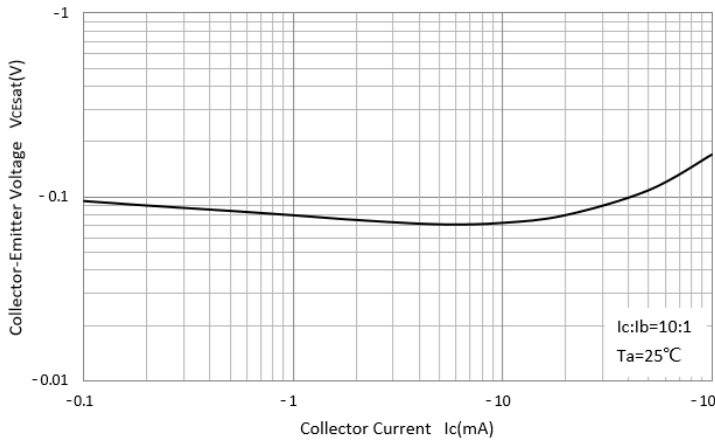

Base-Emitter Saturation Voltage

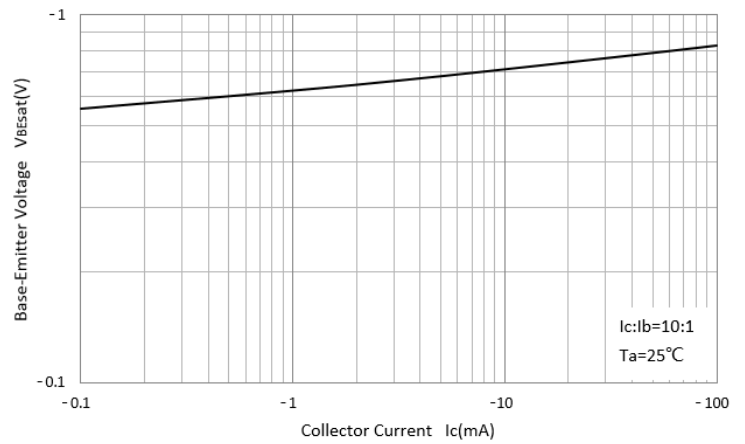


## ■ SOT-23 Package Outline Dimensions

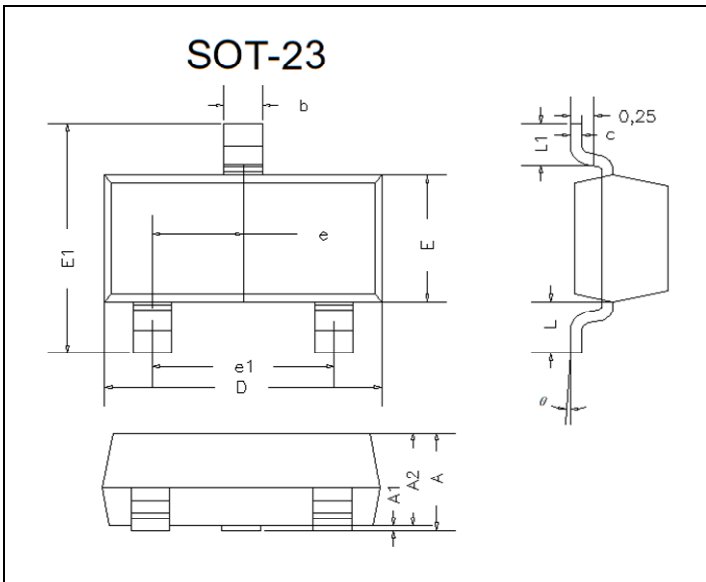

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.035	0.045	0.90	1.15	
A1	0.000	0.004	0.00	0.10	
A2	0.035	0.041	0.90	1.05	
b	0.012	0.020	0.30	0.50	
c	0.004	0.008	0.10	0.20	
D	0.110	0.118	2.80	3.00	
E	0.047	0.055	1.20	1.40	
E1	0.089	0.100	2.25	2.55	
e	0.370TYP		0.95TYP		
e1	0.071	0.079	1.80	2.00	
L	0.220REF		0.55REF		
L1	0.012	0.020	0.30	0.50	
$\theta$	0°	8°	0°	8°	

## ■ SOT-23 Suggested Pad Layout

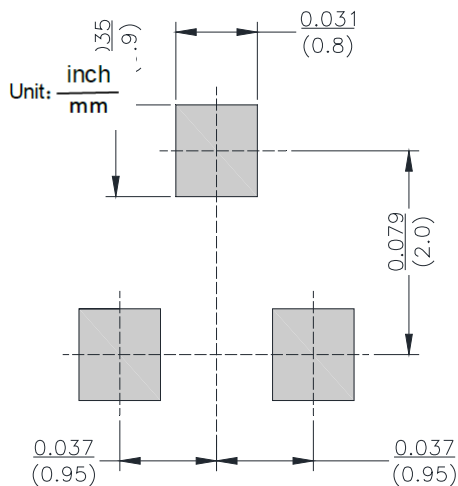



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.